


Telecaster VTLK-4 Series/Parallel Switching Vintage series



NOTE: For this to work you will need to ground the neck pickup cover separately from the neck pickup ground. Disconnect the jumper from the ground (black) wire to the pickup cover on the back of the pickup, and then solder another wire to the pickup cover. Run the new ground wire to the back of the volume pot.

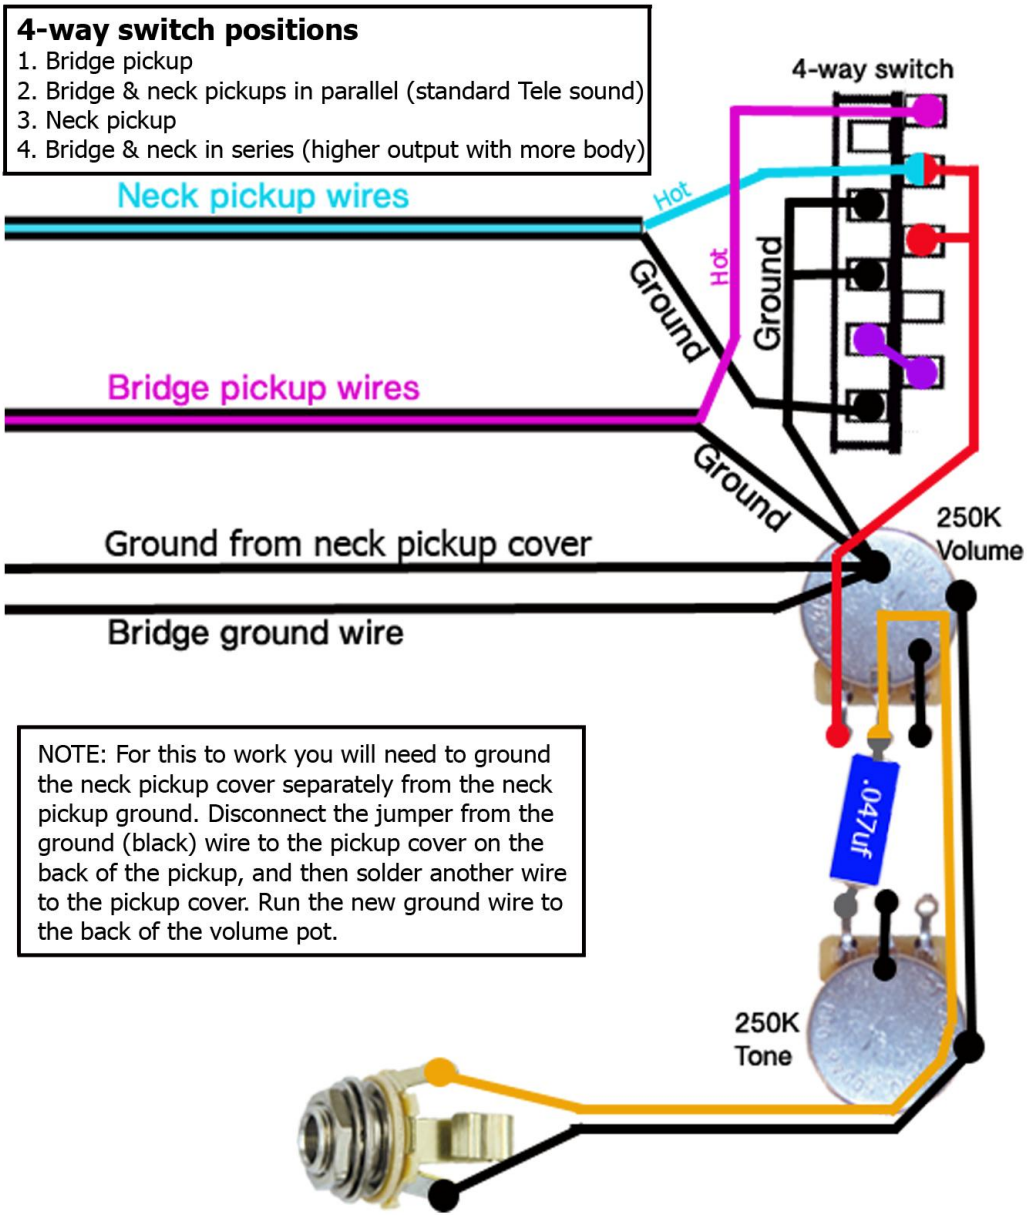

This is a standard 4 way Telecaster wiring configuration that has been altered to a 50's style wiring to retain more of the highs as the volume is turned down. This diagram is using a .047uf/600v oil filled capacitor for a warmer, more vintage tone.